



911 SIGNAL®

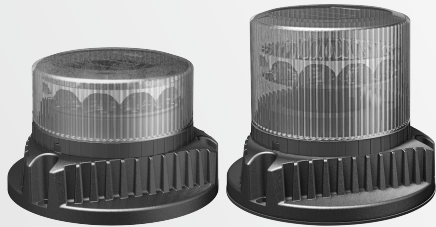



MU / MU PRO Series LED BEACON

DIMENSIONS

MU




MU PRO




TECHNICAL SPECIFICATIONS

Code	MU		MU Pro		MU PRO-E	
	082001	082002	082101	082102	082201	082202
Item	Three Bolts	Magnetic	Three Bolts	Magnetic	Three Bolts	Magnetic
	082003	082004	082103	082104	082203	082204
	Single Point	Flexi-Din	Single Point	Flexi-Din	Single Point	Flexi-Din
LED	15Pcs 3W LED		27Pcs 3W LED		15Pcs 3W LED	
Max Power	22.5W		40.5W		22.5W	
Voltage	DC 10-33V					
Color	Single A/B					
Flash Patterns	19					
LENS	Reflex					
Certification	R65 I / R10 / SAE / T13 / ICAO / CAP 168		R65 II / R10 / SAE / T13 / ICAO / CAP 168		R65 I / R10 / SAE / T13 / ICAO / CAP 168	

WIRING




A13-163 cigar plug with 3m long wire



A13-163 cigar plug with 3m long wire


*Magnet mount; Cigar plug sold separately

MU Wiring




- RED** — For power supply to 10-33VDC
- BLACK** — GND
- YELLOW** — Synchronization, flash pattern selection and reset

- Connect YELLOW wires of all heads together for synchronization
- To change flash patterns, apply +VBAT to YELLOW wire for 1 second and release
- Flash patterns will be reset when YELLOW wires are connected to RED wire for more than 5 seconds




MU PRO Wiring




- RED** — For power supply to 10-33VDC
- BLACK** — GND
- YELLOW** — Synchronization, flash pattern selection and reset
- WHITE** — Dim Mode

- Connect YELLOW wires of all heads together for synchronization
- To change flash patterns, apply +VBAT to YELLOW wire for 1 second and release
- Flash patterns will be reset when YELLOW wires are connected to RED wire for more than 5 seconds
- Connect WHITE wire to +VBAT to activate Dim mode.



MOUNT (MU/ MU PRO)

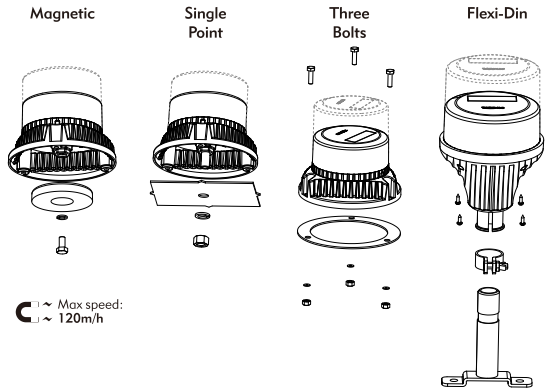

FLASH PATTERNS

1	Random (Default)	11	Single (All) (ICAO/CAP168)
2	Single (Split)	12	Double (All)
3	Double (Split)	13	Quad (All)
4	Quad (Split)	14	Quint (All)
5	Quint (Split)	15	Ultra (All)
6	Ultra (Split)	16	Single-Quad (All)
7	Single-Quad (Split)	17	Single-H/L (All)
8	Single-H/L (Split)	18	Steady4 (All)
9	ECE R65 Single (All)	19	ECE R65 Rotating
10	ECE R65 Double (All)		

911 Signal Technology Inc.

Add: Room 701-702, Hengwei Building, No.258, Tiangao Lane, Shouan Subdistrict, Yinzhou Area, Ningbo City, Zhejiang, China.

Tel: +86 574 89017911 +86 400 6757911

Fax: +86 574 82822560

Email: sales@911signal.com

Website: www.911signal.com